

# JHP FASTENERS, INC


## PRE-ASSEMBLED PANEL FASTENERS

**SERIES**  
Captive - CPFC2  
PEM® - PFC2  
JHP Fasteners - PF



Manufactured by Captive Fastener Corp

**CPFC2 panel fasteners provide permanent attachment of screw assemblies to removable sheet metal panels. Pre-assembled screw assemblies remain captive for easy mounting and removal of panel.**

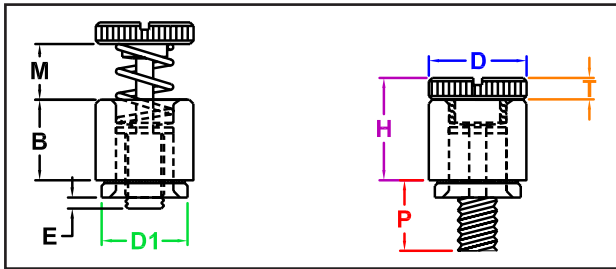

**INCH**

All dimension in inches.

Thread Size	Part number	Stainless Steel	P ±0.016	E ±0.016	M ±0.016	D +0.016 -0.010	H Max.	T ±0.005	B ±0.010	D1 Max	Hole Size +0.003 -0.000	Min Distance to Edge
#4-40	CPFC2440-40		0.250	0.000	0.190	0.310	0.360	0.070	0.280	0.264	0.265	0.250
	CPFC2440-62		0.375	0.125								
	CPFC2440-84		0.500	0.250								
#6-32	CPFC2632-40		0.250	0.000	0.190	0.340	0.360	0.070	0.280	0.280	0.281	0.280
	CPFC2632-62		0.375	0.125								
	CPFC2632-84		0.500	0.250								
#8-32	CPFC22832-50		0.312	0.000	0.250	0.380	0.450	0.080	0.360	0.311	0.312	0.310
	CPFC22832-72		0.437	0.125								
	CPFC22832-94		0.562	0.250								
#10-32	CPFC21032-50		0.312	0.000	0.250	0.410	0.450	0.080	0.360	0.343	0.344	0.340
	CPFC21032-72		0.437	0.125								
	CPFC21032-94		0.562	0.250								
1/4-20	CPFC22420-60		0.375	0.000	0.310	0.470	0.580	0.095	0.470	0.412	0.413	0.380
	CPFC22420-82		0.500	0.125								
	CPFC22420-04		0.625	0.250								
Finish	Passivated											

"PEM" is a registered trademark of Penn Engineering®. Captive Fastener Corporation parts are substitutes for the PEM part numbers in form, fit & function.


JHP Fasteners, Inc. 610 Maryland NE - Suite B Grand Rapids, MI 49505	Drawing No <b>PF-I</b>	P - 800.783.0910 P - 616.913.0060 F - 616.913.0085
Scale NTS	Revision	Drawn by: M McCormick

## PRE-ASSEMBLED PANEL FASTENERS

**SERIES**  
**Captive - CPFC2**  
**PEM® - PFC2**  
**JHP Fasteners - PF**



Manufactured by Captive Fastener Corp

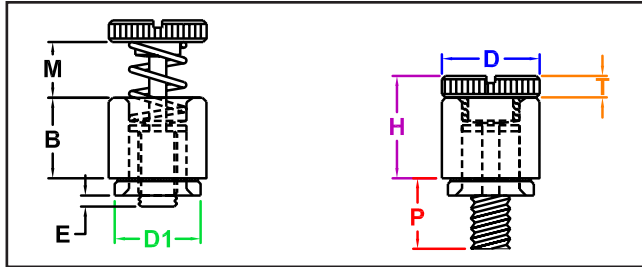

**CPFC2 panel fasteners provide permanent attachment of screw assemblies to removable sheet metal panels. Pre-assembled screw assemblies remain captive for easy mounting and removal of panel.**

### METRIC

All dimension in millimeters.

Thread Size	Part number Stainless Steel	P ±0.4	E ±0.4	M ±0.4	D +0.4 -0.25	H Max.	T ±0.13	B ±0.25	D1 Max	Hole Size +0.08 -0.00	Minimum Distance to Edge
M3 X 0.5	CPFC2M3-40	6.4	0.0	4.8	7.9	9.1	1.83	7.2	6.7	6.75	6.4
	CPFC2M3-62	9.5	3.2								
	CPFC2M3-84	12.7	6.4								
M4 X 0.7	CPFC2M4-50	7.9	0.0	6.4	9.5	11.4	2.08	9.3	7.9	7.95	7.9
	CPFC2M4-72	11.1	3.2								
	CPFC2M4-94	14.3	6.4								
M5 X 0.8	CPFC2M5-50	7.9	0.0	6.4	10.3	11.4	2.08	9.3	8.7	8.75	8.7
	CPFC2M5-72	11.1	3.2								
	CPFC2M5-94	14.3	6.4								
M6 X 1.0	CPFC2M6-60	9.5	0.0	7.9	11.9	14.6	2.49	12.0	10.5	10.5	9.5
	CPFC2M6-82	12.7	3.2								
	CPFC2M6-04	15.9	6.4								
Finish	Passivated										

"PEM" is a registered trademark of Penn Engineering®. Captive Fastener Corporation parts are substitutes for the PEM part numbers in form, fit & function.

JHP Fasteners, Inc. 610 Maryland NE - Suite B Grand Rapids, MI 49505	Drawing No <b>PF-M</b>	P - 800.783.0910 P - 616.913.0060 F - 616.913.0085
Scale NTS	Revision	Drawn by: M McCormick