


## SERIES

Captive - CPN / CPR  
 PEM® - PTS2 / PTL2  
 JHP Fasteners - PFR

## SELF-CLINCHING PLUNGERS



Manufactured by Captive Fastener Corp

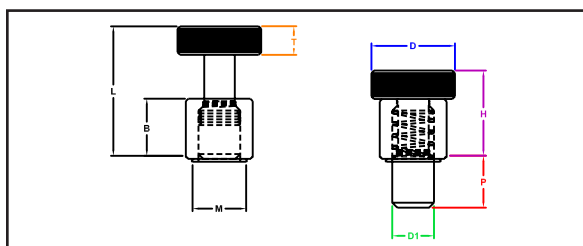

CPN & CPR spring-loaded plunger assemblies are used as positioning pins and locking stops on drawer slides and equipment consoles. CPR series has a hold open feature activated by pulling out the plunger head and rotating it, which allows smooth slide operation.

## INCH

Part Number	All dimensions are in inches										
	H ±.010	B ±.005	M Max	D ±.010	D1 +.000 -.005	P ±.010	L Norm	T ±.010	Minimum Mat'l Thick	Hole Size +.003 -.000	Min Distance to Edge
CPN-04 -4	0.595	0.430	0.327	0.50	0.250	0.31	0.895	0.17	0.060	0.328	0.34
CPR-04 -4	0.510	0.350	0.327	0.50	0.250	0.31	0.780	0.17	0.060	0.328	0.34

## METRIC

Part Number	All dimensions are in millimeters										
	H ±.25	B ±.13	M Max	D ±.25	D1 +.000 -.13	P ±.25	L Norm	T ±.25	Minimum Mat'l Thick	Hole Size +.08 .00	Min Distance to Edge
CPN-04 -4	15.11	10.92	8.31	12.7	6.35	7.87	22.73	4.32	1.53	8.33	8.64
CPR-04 -4	12.95	8.89	8.31	12.7	6.35	7.87	19.81	4.32	1.53	8.33	8.64

"PEM" is a registered trademark of Penn Engineering®.  
 Captive Fastener Corporation parts are substitutes for  
 the PEM part numbers in form, fit & function.

JHP Fasteners, Inc.  
 610 Maryland NE - Suite B  
 Grand Rapids, MI 49505

Drawing No

PFR

P - 800.783.0910  
 P - 616.913.0060  
 F - 616.913.0085

Revision

Drawn by:

M McCormick

Scale

NTS