

## SERIES

Captive - CF40 / CF40S


PEM® - DSO / DSOS

JHP Fasteners - TSOD

## SELF-CLINCHING STANDOFFS



Manufactured by Captive Fastener Corp

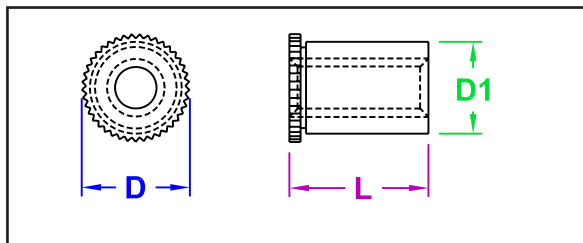

**CF40 & CF40S miniature standoffs are designed to be used in limited space applications. They are ideal for securing D-sub connectors to enclosure backplanes and provide a flush mounting surface for RF/EMI gaskets.**

### INCH

Part Number		All Dimension are in inches							
Thread Size	Carbon Steel	Stainless Steel	L Length +0.002 / -0.005 in.	Hole Size +0.003 -0.000	D1 Max	D Nom	Min Distance to Edge	Mat'l Thick	
#4-40	CF40-440	CF40S-440	-0.250	-0.275	0.017	0.165	0.194	0.126	0.037 - 0.250
Finish	Zinc Yellow	Passivated							

### METRIC

Part Number		All Dimension are in millimeters							
Thread Size	Carbon Steel	Stainless Steel	L Length +0.05 / -0.13mm	Hole Size +0.08 -0.000	D1 Max	D Nom	Min Distance to Edge	Mat'l Thick	
M3	CF40-M3	CF40S-M3	-6.35	-7	4.2	4.2	4.92	3.2	0.94 - 6.35
Finish	Zinc Yellow	Passivated							

"PEM" is a registered trademark of Penn Engineering®. Captive Fastener Corporation parts are substitutes for the PEM part numbers in form, fit & function.

JHP Fasteners, Inc.  
610 Maryland NE - Suite B  
Grand Rapids, MI 49505

Scale  
NTS

Drawing No

TSOD

Revision

P - 800.783.0910  
P - 616.913.0060  
F - 616.913.0085

Drawn by:

M McCormick