


SELF-CLINCHING NUTS

SERIES

Captive - CFH, CFHN & CFHNL
 PEM® - H, HN & HNL
 JHP Fasteners - SCH & SCHL



Self-Locking Shown
 Manufactured by Captive Fastener Corp

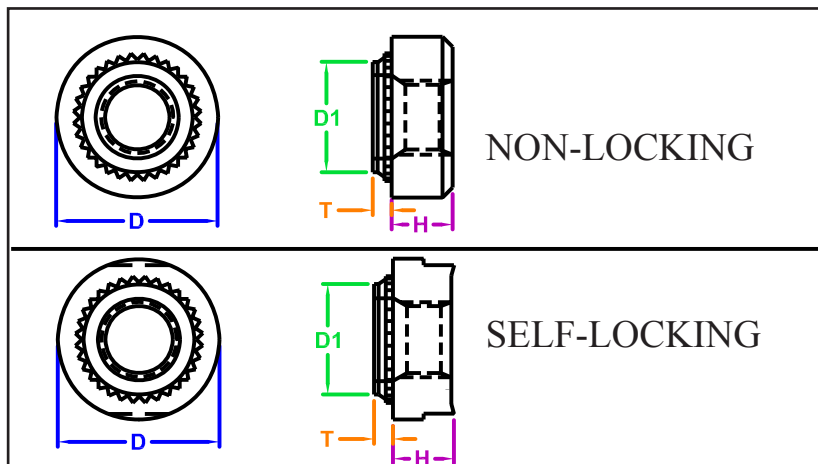

CFH nut fasteners are available in both locking and non-locking, heat treated and non-heat treated, offering an opportunity to up-grade fastening quality with appreciable cost reduction over weld nuts.

INCH

All dimensions are in inches									
Thread Size	Non-Locking Part Number	Self-Locking Part Number	T (max)	Minimum Mat'l Thick	Hole Size	D1 (max)	D ± 0.01"	H Non-Locking ±0.005" Self-Locking ±0.10"	Min Dist to Edge
1/4-20	CFH420		0.058	0.058	0.344	0.343	0.5	0.189	0.34
	CFHN420	CFHNL420							

METRIC

All dimensions are in millimeters									
Thread Size	Non-Locking Part Number	Self-Locking Part Number	T (max)	Minimum Mat'l Thick	Hole Size	D1 (max)	D 0.25mm	H Non-Locking ±0.12mm Self-Locking ±0.25mm	Min Dist to Edge
M6 X 1.0	CFHM6		1.48	1.48	8.75	8.72	12.80	5.00	10.00
	CFHNM6	CFHNL6							

"PEM" is a registered trademark of Penn Engineering®.
 Captive Fastener Corporation parts are substitutes for the PEM part numbers in form, fit & function.

JHP Fasteners, Inc. 610 Maryland NE - Suite B Grand Rapids, MI 49505	Drawing No SCH	P - 800.783.0910 P - 616.913.0060 F - 616.913.0085
Scale NTS	Revision	Drawn by: M McCormick